

# Series 1007.60

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

### Mechanical Data

Center	1.27 mm / 50 mil
Full Travel	2.54 mm
Pre-Loaded Spring Force	0.20/ 0.30 N
Spring Force at Full Travel	0.80/ 1.50 N

### Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	≤ 50 mOhm





### Materials

Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	CuBe, rhodium plated
Receptacle	Bronze, gold plated
Wire AWG 32 (Blue)	Copper, silver plated, insulated


### Recommended Diameter of Drill

HP 2361.1 (Trolitax)	0.87 mm
with pressed-in Ring	0.95 mm
HGW 2372 (Glass filled Material)	0.87 mm
with pressed-in Ring	0.95 mm


### Tip Style · Diameter · Plating

			
<b>B</b>	<b>E</b>	<b>G3</b>	<b>K</b>
0.50C Rh	0.80C Rh	0.50C Rh	0.90C Rh

1007.60

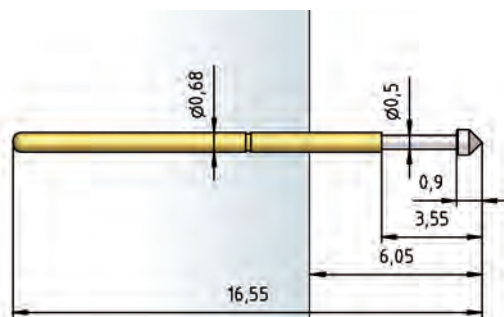

H 1007.60 V700

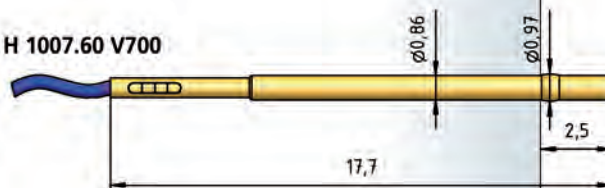

### How to Order

**1007.60 - K - 0.8 N - Rh - 0.9 C**

1. Series 2. Variant 3. Tip Style 4. Spring Force 5. Tip Plating 6. Tip Diameter 7. Tip Material (only for CuBe)