

Series 4005

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

Mechanical Data

Center	3.50 mm / 138 mil
Full Travel	10.00 mm
Working Travel	6.00 mm
Spring Force at Working Travel	0.80 N
Operating Pressure	6 bar
Operating Medium	Compressed Air (filtered, oil-free)

Electrical Data

Max. Current Rating	2.0 A
Typical Continuity Resistance	≤ 30 mOhm





Materials

Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Brass, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	3.00 mm
HGW 2372 (Glass filled Material)	3.01 mm

Tip Style · Diameter · Plating

			
BST1	C	G	H
1.50 Rh	2.50 Rh	1.30 Rh	2.00 Rh

Accessories see page 146


4005

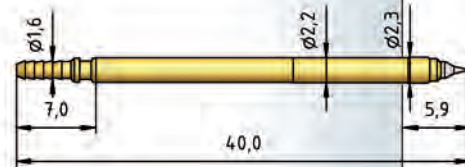


4005...-L



H 4005

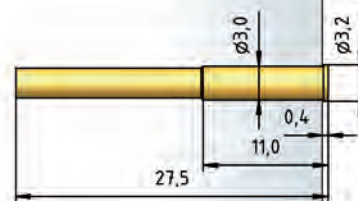

L 4000



How to Order

4005 - **BST1** - **0.8 N** - **Rh** - **2.0** - **L**

1. Series 2. Tip Style 3. Spring Force 4. Tip Plating 5. Tip Diameter
6. For Connection of L 4000