

Series 1025/D

- Use in cases of bad soiling, oxydation or flux residues
- Penetration of these platings by rotating movement

Mechanical Data

Center	2.54 mm / 100 mil
Full Travel	6.40 mm
Working Travel	4.30 mm
Pre-Loaded Spring Force	0.60 N
Spring Force at Working Travel	2.00 N

Electrical Data

Max. Current Rating	5.0...8.0 A
Typical Continuity Resistance	≤ 20 mOhm

Materials

Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel, gold plated
Receptacle	Bronze, gold plated

Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.65 mm
with pressed-in Ring	1.75 mm
HGW 2372	1.67 mm
with pressed-in Ring	1.76 mm


Tip Style · Diameter · Plating



KD

1.50 Au

1025/D

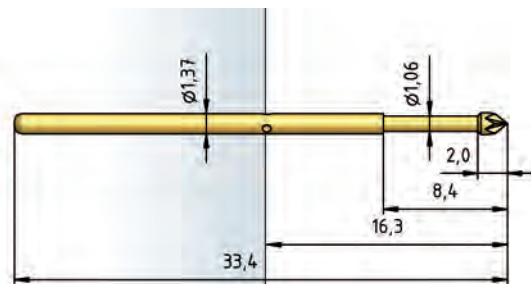

Receptacles see page 64

How to Order

1025/D - KD - 2.0 N - Au - 1.5

1. Series 2. Tip Style 3. Spring Force 4. Tip Plating 5. Tip Diameter